

Kontaktmanometer / Contact Gauges VG20SE Series

Product Features

- Contact gauge (KI) with inductance contact,
- For monitoring gas supply pressure and shortage,
- For inert, combustible, oxidizing, and corrosive gases and gas mixtures,
- line 0.5m
- With NAMUR sensor
- Set point adjustable over 0-24% of scale
- Tested for use with oxygen

Typical Applications


Gas panels may be optionally equipped with contact pressure gauges. Contact pressure gauges combine the advantages of in situ readings with the demands of electrical signal transmissions. In combination with signal boxes, this creates visual and acoustic warning signals in the case of pressure drop and the monitoring of line pressure according to adjustable thresholds.



Technical Data

Dual scale	bar / psi
Connection	1/4"NPT(M)
Size	2"
Accuracy	+/-2.5% of full scale
Body Material	316L
Switching function	Normally closed
Outlet type	NAMUR
Temperature	-25-100°C

Dimensions (mm)

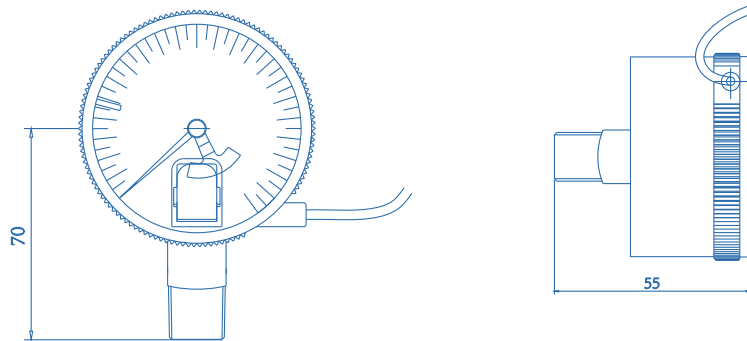

Ordering Information

VG 20 SE - 400

G: Bottom inlet Connection

R: Rear inlet Connection

S: 316L

C: Chrome plated brass

400 : 400 bar

250 : 250 bar

60 : 60 bar

25 : 25 bar

VIGOUR®