


Pigtails / Flaschenwendeln

VPP/VPG/VPF/VPS Series

A pigtail connects between a regulator and cylinder with maximum inlet pressure of 400 Bar (VPP series);300 Bar (VPS series);200 Bar(VPF series).
Tested for use with oxygen.

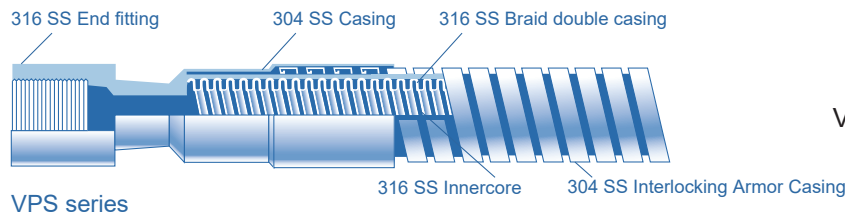

VPP series



VPS/VPF series



VPG series



Ordering Information

VPF - 1/4 - 10 - F4 - F4

Type

F: flexible hose core PTFE
S: flexible hose core 316 SST

Orifice

1/4: 1/4"
1/8: 1/8"

Length

5: 500 mm
6: 600 mm
10: 914 mm
20: 2000 mm
30: 3000 mm
50: 50000 mm

Outlet Connections

F4: 1/4"NPT(F)
M4: 1/4"NPT(M)
04: 1/4" tube fitting

Inlet Connections

F4: 1/4"NPT(F)
CGAXXX: CGA cylinder connection
BSPX: BSP cylinder connection

VPP - 1/4 - 10 - TB - 04

Type

P: pigtail 316 SST(bending diameter 67mm)
G: pigtail 316 SST(bending diameter 240mm)

Orifice

1/4: 1/4" tube
6: 6mm tube

Length

10: 300 mm

Outlet Connections

F4: 1/4"NPT(F)
M4: 1/4"NPT(M)
04: 1/4" tube fitting
TB: tube

Inlet Connections

TB: tube
CGAXXX: CGA cylinder connection
BSPX: BSP cylinder connection
DINX: BSP cylinder connection