

Panel & Line Regulators / Leitungs- & Paneldruckminderer

VSR-6EL & VSR-6ELP Series

Product Features

- Diaphragm design high pressure piston regulator
- Line and Panel mounting pressure regulator
- Brass chrome plated body and bonnet for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- Stainless steel 316L body for corrosive gases
- 4 ports flexible configuration
- Simple outlet pressure limitation by handwheel
- Stable outlet pressure
- Inlet filter
- Tested for use with oxygen

Typical Applications

- Component Testing
- Calibration Systems
- Laboratory Pressure Control
- High Pressure Sampling Systems
- Service & Test Equipment




VSR-6EL



Mounting panel
Model No.: VSR-T-BPB


Dimensions (mm)

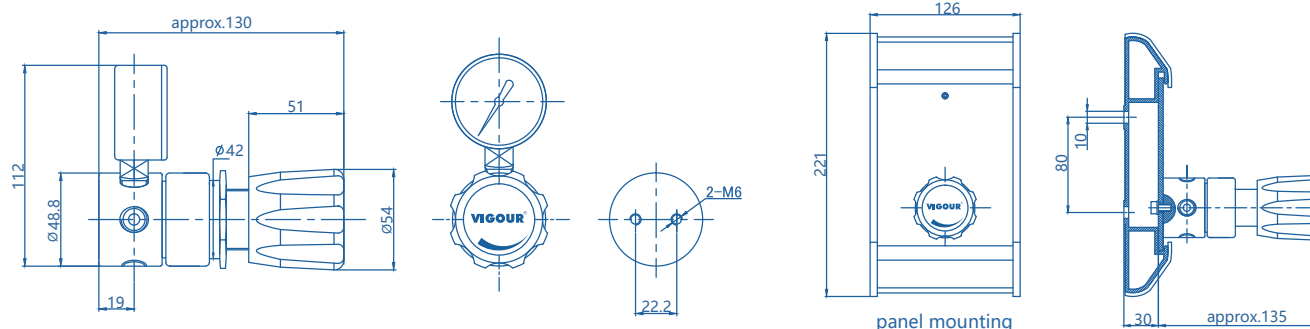

Technical Data


Type:	single-stage
Inlet pressure P ₁ :	max. 300 bar
Outlet pressure P ₂ :	50/100/200 bar
Materials	
Body regulator:	see ordering info
Valve seat:	PCTFE
Piston:	SS316L
O-ring:	Viton® (FKM)
(option)	Kalrez® (FFKM)
Filter:	SS 316L
Inlets and Outlets:	1/4" NPT(F)
Temperature range:	-30°C to +74°C
Leak rate (to atmosphere) (via seat)	1x10 ⁻⁸ mbar l/s He 1x10 ⁻⁶ mbar l/s He
Flow capacity:	Cv=0.15
Weight:	1.13 kg

Flow Chart

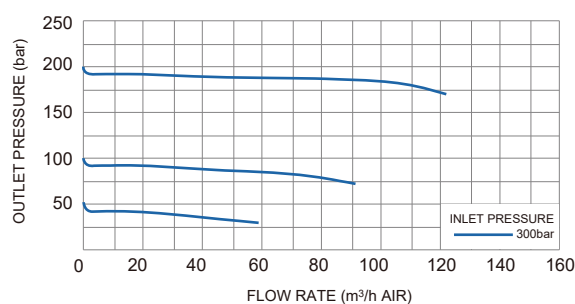

Leitungs- & Paneldruckminderer / Panel & Line Regulators VSR-6EL & VSR-6ELP Series

Ordering Information



Inlets / Outlets

F4: 1/4"NPT(F)

M4: 1/4"NPT(M)

F6: 3/8" NPT(F)

M6: 3/8" NPT(M)

O2: 1/8" Tube fitting

O4: 1/4" Tube fitting

O6: 3/8" Tube fitting

6M: 6mm Tube fitting

8M: 8mm Tube fitting

TW6M: 6mm weld tube

TW8M: 8mm weld tube

P: Gauge(Psig/bar)

B: Plug

* Other connection standard, consult factory.

Port Selection

VSR - 6EL S - 300 - 50 - 1 - 2 - 3 - 4 - N₂

Type

L: Line

LP: Panel

Body Material

S: 316L

C: Chrome Plated Brass

Inlet Pressure P₁

100: 100 bar

200: 200 bar

300: 300 bar

Type Of Gas

Please specify type of gas

Outlet Pressure P₂

50: to 50 bar

100: to 100 bar

200: to 200 bar

Ordering Example

Example: VSR - 6EL C - 200 - 50 - F4 - P - F4 - B - O₂

1 - 2 - 3 - 4

