

Alarm Systems / Signalgeber

VAS100 Series

Product Features


- Alarm unit come in 8 or 16 channel version
- For connection of 8 or 16 digital input signals such as contact pressure gauges or pressure switches Suitable for transducers in accordance to NAMUR specifications
- All channels are individually programmable as normally closed or normally open contact
- Delay mode (2 sec.) is integrated for all channels
- Potential-free output RS-485
- Visible alarm
- Acoustic alarm
- Aluminum housing for wall mounting



Technical Data

Type of monitoring	unrestricted
Supply voltage	AC220V (110V) / 50Hz
Power consumption	10 W
Input signal	switch signal
Input capacity	8/16 channels
Output contact	2
Output voltage	DC 12V
Output current	3A
Communication interface	RS-485 (option)
Dimensions	240*200*70 mm

Dimensions

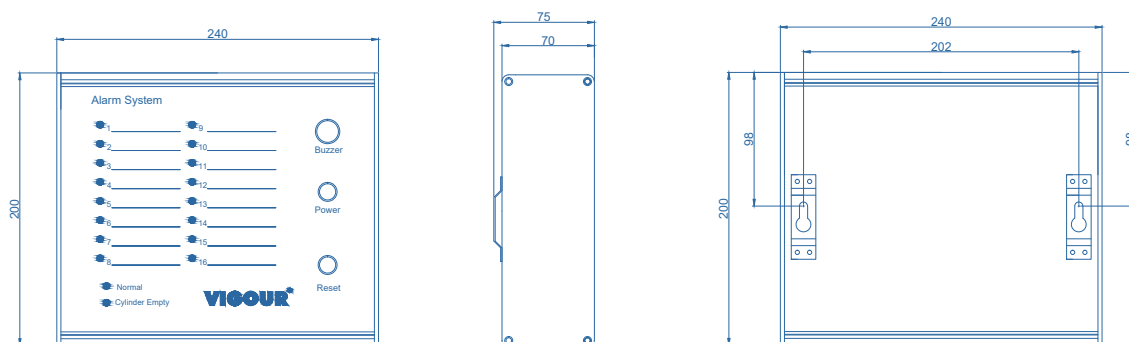

Ordering Information

VAS100 - 8 - 110

Input Capacity

8: 8 channels

16: 16 channels

Supply Voltage

110: AC110V

None: AC220V