

Flaschenanschlüsse / Cylinder Connections

VCC Series

Product Features

- Cylinder Connections
- Connect to a cylinder valve
- 1/4NPT male /6mm tube fitting /6mm OD tube connection
- Maximum working pressure 200 bar standard
- All connection are supplied with sealing washer



USA - CGA



German - DIN




China - GB



British - BSP



CGA DISS

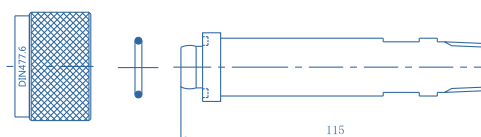

Hand tight nut & nipple
(Example: VCC-C-HNN-DIN477.6)

Ordering Information

VCC - C - N - CGA580 - 6M

Material

S: 316L
C: Chrome Plated Brass
B: Brass

Parts

N: Nut
NN: Nut & Nipple
HN: Hand tight nut
HNN: Hand tight nut & Nipple
G: Gasket
P: Plug

Inlet Connection

M4: 1/4"NPT(M)
6M: 6mm Tube fitting
TW6M: 6mm Tube weld
TW4: 1/4" Tube weld

Cylinder Connection

Detailed description of the cylinder connection including the relevant standard and number of the connection