

Cylinder Pressure Regulators / Flaschendruckminderer

VSR-2E Series



Product Features

- Cylinder pressure regulator
- Brass chrome plated body for inert, reactive, flammable and oxidizing gas and mixtures up to grade 6.0
- Stainless steel 316L body for corrosive gases
- 6 ports flexible configuration
- Stable outlet pressure
- Simple outlet pressure limitation by handwheel
- Inlet filter
- Tested for use with oxygen

Typical Applications

- Component Testing
- Calibration Systems
- Laboratory Pressure Control
- High Pressure Sampling Systems
- Service & Test Equipment



Dimensions (mm)

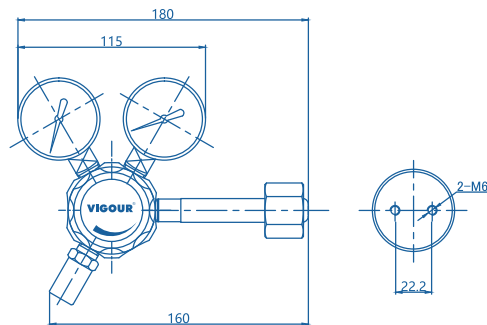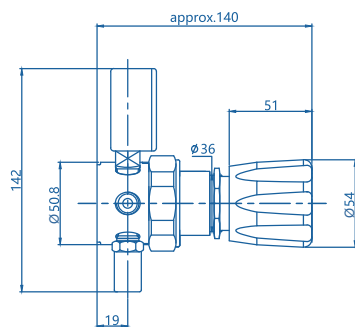

Technical Data

Type:	single-stage
Inlet pressure P ₁ :	max. 300bar
Outlet pressure P ₂ :	-1bar / 2/4/10/20/ 35/50bar
Materials	
Body regulator, relief valve:	see ordering info
Valve seat:	PCTFE
Diaphragm:	Hastelloy® C276
Filter:	SS 316L
O-ring:	Viton® (FKM)
(option)	Kalrez® (FFKM)
Inlets and Outlets:	1/4" NPT(F)
Temperature range:	-30°C to +74°C
Leak rate (to atmosphere)	1x10 ⁻⁸ mbar l/s He
(via seat)	1x10 ⁻⁶ mbar l/s He
Flow capacity:	Cv=0.08
Weight:	1.25 kg


Flow Chart

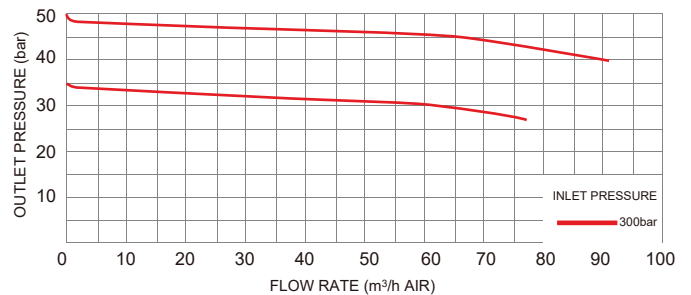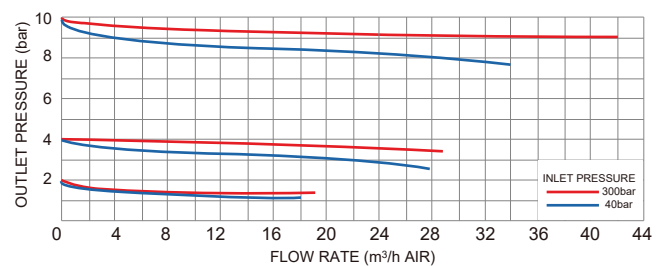

Flaschendruckminderer / Cylinder Pressure Regulators

VSR-2E Series

Ordering Information:



Inlets / Outlets

DIN: Germany	NF: French	04: 1/4" Tube fitting	TW8M: 8mm Weld tube
CGA: USA	JIS: Japan	06: 3/8" Tube fitting	P: Gauge(Psig/bar)
BSP: British	F4: 1/4"NPT(F)	6M: 6mm Tube fitting	R: Relief valve
GB: China	M4: 1/4"NPT(M)	8M: 8mm Tube fitting	B: Plug
UNI: Italy	02: 1/8" Tube fitting	TW6M: 6mm Weld tube	

* Other connection standard, consult factory.

Port Selection

VSR - 2EPS - 200 - 20 - 1 - 2 - 3 - 4 - 5 - 6 - N2

Type

None: Standard mounting
P: Panel mounting

Body Material

S: 316L
C: Chrome Plated Brass

Inlet Pressure P₁

40: 40 bar
100: 100 bar
200: 200 bar
300: 300 bar

Outlet Pressure P₂

2: to 2 bar
4: to 4 bar
10: to 10 bar
20: to 20 bar
35: to 35 bar
50: to 50 bar
V2: -1bar to 2 bar
V4: -1bar to 4 bar
V10: -1bar to 10 bar
V20: -1bar to 20 bar

Type of Gas

Please specify type of gas

Ordering Example

Example: VSR - 2EC - 200 - 10 - CGA - P - P - F4 - B - B - O₂

1 - 2 - 3 - 4 - 5 - 6



* For mixed gases, please specify cylinder connection standard and thread when ordering.

VIGOUR®